

# AS200-s

## Ultra Low Oil-Bleed Thermal Conductive Gel Pad

LiPOLY AS200-s is a material designed for gap filling. The thermal conductivity is 2.0 W/m\*K. The hardness is Shore OO/35, with high flexibility and compressibility. AS200-s has ultra-low oil bleeding properties, which helps reduce pollutants from silicon oil, keeping electronic components clean.

### FEATURES

- / Thermal conductivity:2.0 W/m\*K
- / High compressibility
- / Low oil-bleeding
- / Naturally tacky and high resilience

### TYPICAL APPLICATION


- / Notebook computers
- / Heat pipe assemblies
- / TV hardware
- / Wireless communication hardware
- / High speed mass storage drives
- / Set top box
- / IP CAM

### SPECIFICATIONS


- / Sheet form
- / Die-cut parts

### TYPICAL PROPERTIES

PROPERTY	AS200-s	TEST METHOD	UNIT
Color	Gray	Visual	-
Surface tack 2-side/1-side	2	-	-
Thickness	Customized	ASTM D374	mm
Density	2.2	ASTM D792	g/cm <sup>3</sup>
Hardness	35	ASTM D2240	Shore OO
Application temperature	-60~180	-	°C
ROHS & REACH	Compliant	-	-
COMPRESSION@1.0mm			
Deflection @10 psi	10	ASTM D5470 modify	%
Deflection @20 psi	17	ASTM D5470 modify	%
Deflection @30 psi	26	ASTM D5470 modify	%
Deflection @40 psi	35	ASTM D5470 modify	%
Deflection @50 psi	39	ASTM D5470 modify	%
ELECTRICAL			
Dielectric breakdown	12	ASTM D149	KV/mm
Surface resistivity	>10 <sup>10</sup>	ASTM D257	Ohm
Volume resistivity	>10 <sup>11</sup>	ASTM D257	Ohm-m
THERMAL			
Thermal Conductivity	2.0	ASTM D5470	W/m*K
Thermal impedance@10 psi	0.892	ASTM D5470	°C-in <sup>2</sup> / W
Thermal impedance@20 psi	0.824	ASTM D5470	°C-in <sup>2</sup> / W
Thermal impedance@30 psi	0.783	ASTM D5470	°C-in <sup>2</sup> / W
Thermal impedance@40 psi	0.731	ASTM D5470	°C-in <sup>2</sup> / W
Thermal impedance@50 psi	0.704	ASTM D5470	°C-in <sup>2</sup> / W

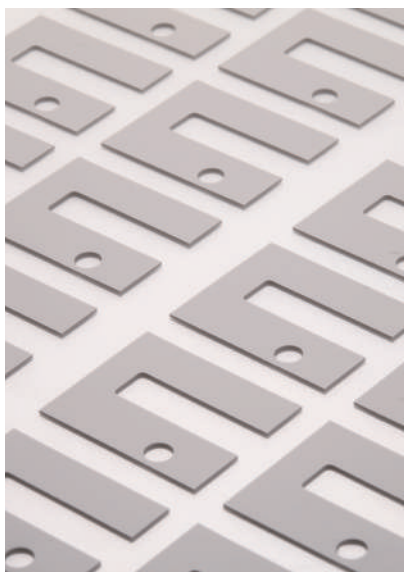


### Thermal Resistance vs. Pressure vs. Deflection

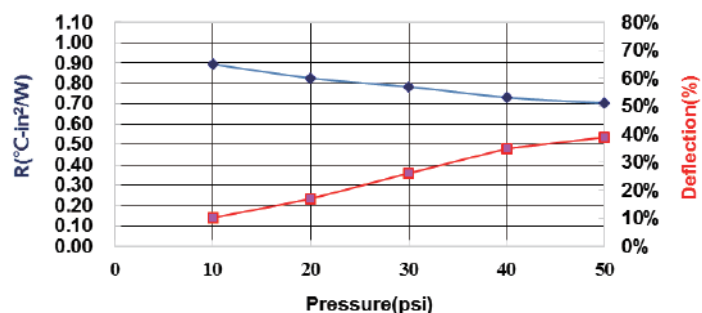

#### OIL BLEEDING

- / Size 30\*30mm<sup>2</sup>
- / Thickness 1.0mm
- / Compression 50%
- / Temperature 25°C
- / Time 120h

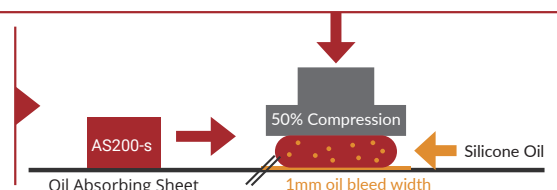

Note: All specifications provided by LiPOLY are subject to change without notice. The test methods used by LiPOLY are based on the TIM Tester method and ASTM D5470 test method. These test methods are used as the definition standards for LiPOLY. Property values provided in this document are not for product specifications or guaranteed. This document does not guarantee the performance and quality required for the purchaser's specific purpose. The purchaser needs to evaluate and verify the safety before using the material. We strongly recommend the purchaser pre-test the product and verify the performance of the product under the purchaser's specific conditions. Liability and use of the product are the responsibility of the end user. LiPOLY makes no warranty as to the suitability, merchantability, or non-infringement of any LiPOLY material or product for any specific or general uses. LiPOLY shall not be liable for incidental or consequential damages of any kind. All LiPOLY products are sold in accordance with the LiPOLY Terms and Conditions in effect at the time of purchase and a copy of which will be furnished upon request. All rights reserved, including LiPOLY trademarks or registered trademarks of LiPOLY or its affiliates. Statements concerning possible or suggested uses made herein shall not be relied upon or be construed as a guaranty of patent infringement. Copyright 2022 LiPOLY.